

ExactoTorque™ Another Innovation from ACI

A large number of rod and nut failures are the result of inaccurate pre-stress.

ExactoTorque™ is the ACI patented solution to address this issue.




The Age Old Problem – Achieving Proper Torque

- Most piston rods a pre-stress torque of 30,000 psi.
 - Conventional methods generally utilize a large hex nut, which is difficult to tighten.
 - Proper installation of the hex nut requires unwieldy and sometimes hazardous application tools.
 - Improper assembly loads are common.
- Galling between the nut face and crosshead face is very common as the two surfaces turn against one another.
 - Galling can lead to subsequent loss of crosshead face squareness, resulting in excessive rod bending.
 - Consequential effects can lead to rod failures, packing leakage and wear, cylinder bore and piston scuffing, and loss of crosshead tightness.

The Proven Solution – ExactoTorque™

- **How it Works**
 - Jackscrews threaded through a nut body and seated on individual bearing pads.
 - Each pad has a spherical surface that allows proper alignment with the jackscrew.
 - Proper preload accurately achieved through the combined applied torque load of each jackscrew.
- **Improved Rod Stretch**
 - Rod stretch enhanced by the counter-bore at the mating surface end of the nut.
- **Pre-stress without Rotation**
 - Rotation of the hex nut contributes to nut and rod damage due to galling.
 - ExactoTorque™ achieves proper torque without rotation.
- **Ease of Installation**
 - ExactoTorque™ simply spins on to the rod.
 - Jackscrews are torqued to predetermined load using standard torque wrenches.
- **Proven in the Field**
 - Field proven for over 25 years.
 - Also effectively used with foundation bolts, and Coupling bolts

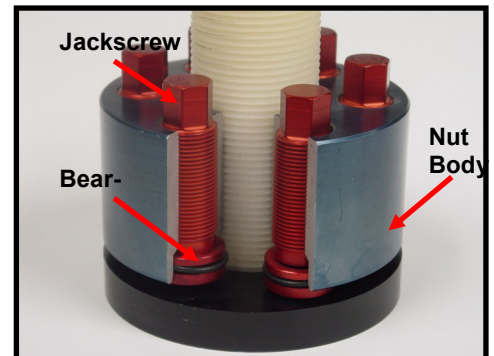

ACI Services, Inc.

Reciprocating Compressor Experts

125 Steubenville Ave. • Cambridge, Ohio 43725

Phone: (740) 435-0240 • Fax: (740) 435-0260

Visit our websites: www.ACIServicesInc.com

www.CompressorConnection.com